BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images, please do not report the images to the Image Problem Mailbox.

PCT / IB 99 / 01214
13. 07. 99

The Patent Office 09/720833

INVESTOR IN PEOPLE

IB99/1274

5

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 16 JUL 1999
WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Signed

Dated 29.6.99

Patents Form 1/77

Patents Act 1977
(R

The Patent Office

1/77

9
01JUL98 E372075-1 D02893
P01/7700 25.00 - 9814100.5

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

1515

2. Patent application number
(The Patent Office will fill in this part)

01 JUL 1998 9814100.5

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*

Kristján Björn ÓMARSSON
Grund
Villingsholltshreppi
801 Selfoss
ICELAND

Patents ADP number *(if you know it)*

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

Fuel-Air Mixture Apparatus

5. Name of your agent *(if you have one)*

"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*

NIGEL BROOKS CPA
HILL HAMPTON
EAST MEON
PETERSFIELD
HAMPSHIRE GU32 1QN

Patents ADP number *(if you know it)*

463001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country	Priority application number *(if you know it)*	Date of filing *(day / month / year)*
GB	na	NA
NA	NA	NA

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing *(day / month / year)*

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*

a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d))

no

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	7
Claim(s)	0
Abstract	0
Drawing(s)	3 +3

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent *(Patents Form 7/77)*	0
Request for preliminary examination and search *(Patents Form 9/77)*	0
Request for substantive examination *(Patents Form 10/77)*	0
Any other documents *(please specify)*	

11. I/We request the grant of a patent on the basis of this application.

Signature [signature] Date 29/06/98

12. Name and daytime telephone number of person to contact in the United Kingdom: NIGEL BROOKS CPA (01730) 823647

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*

b) *Write your answers in capital letters using black ink or you may type them.*

c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*

d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*

e) *Once you have filled in the form you must remember to sign and date it.*

f) *For details of the fee and ways to pay please contact the Patent Office.*

FUEL-AIR MIXTURE APPARATUS

Background of the Invention

The present invention relates to a fuel-air mixture apparatus, particularly for an internal combustion engine.

Fuel-air mixture apparatuses of the type where fuel is mixed with air prior to induction into the cylinder(s) of an engine generally rely on a pressure reduction at a throttle in the device to draw fuel into the device, in which case the device is known as a carburettor, or rely on fuel injection into the air as it passes through the device.

Generally, the prior devices rely on a single stage of mixture of fuel and air and are limited as regards the droplet size and total vaporisation of the fuel in the air which they induce. Inadequate vaporisation and too large a droplet size result in unburned and/or incompletely burnt fuel being present in the exhaust from the engine.

In my International Application No WO 97/48897, I have described and claimed an invention which I refer to below as "My Earlier Invention" and which comprises a fuel-air mixture apparatus having:

- a primary air passage having an inlet, an adjustable throttle and an outlet,
- a secondary air passage having an inlet and an outlet to the primary air passage between its adjustable throttle and its outlet,
- a variable orifice nozzle for introducing fuel into the secondary air passage, the nozzle having a mouth and a down-stream pointing tapered needle in the mouth to provide variability of the orifice by axial movement of the needle and
- a linkage or control device for linking or controlling the position of the needle to the position of the adjustable throttle in the primary air passage for adjustment of the orifice of the nozzle,

the arrangement being such that in use the fuel mixes with the air flowing through the secondary air passage prior to mixing with the air flowing in the primary air passage. and the fuel flow from the nozzle is matched to the position of the adjustable throttle.

The Invention

The object of the present invention is to a further improved fuel air mixture apparatus.

The invention is based on passing a fuel-air mixture through an apertured block in the apparatus to enhance the degree of mixing of the fuel with the air.

According to my present invention, there is provided a fuel-air mixture device comprising:

- a primary air passage having an inlet, an adjustable throttle and an outlet,
- means for introducing fuel to the primary air passage at a position between the adjustable throttle and the outlet, and
- an apertured block having a plurality of air passageways through the block, which subdivide a portion of the primary air passage between the fuel introduction position and the outlet.

The apertured block may be integral with a member defining the primary air passage. Alternatively it may be fitted to the latter. In this case, the apertured block may be mounted in such manner as to be ultrasonically excitable. Typically this can be by mounting the block in an ultrasonically excitable ring. Alternatively, the passageways in the block can be lined by ultrasonically excitable tubes.

In one preferred embodiment, the apertured block is provided down stream of the position of the fuel introduction means.

In another preferred embodiment, the apertured block is provided at and extending downstream of the position of the fuel introduction means.

Normally in common with My Earlier Invention, the present fuel-air mixture device will include:

- a variable orifice nozzle for introducing fuel to the primary air passage, the nozzle having a mouth and a tapered needle in the mouth to provide variability of the orifice by axial movement of the needle and

- a linkage or control device for linking or controlling the position of the needle to the position of the adjustable throttle in the primary air passage for adjustment of the orifice of the nozzle.

I prefer that the present fuel-air mixture apparatus should be fully in accordance with My Earlier Invention, that is to say incorporating:

- a secondary air passage having an inlet and an outlet to the primary air passage between its adjustable throttle and its outlet,

the arrangement being such that in use the fuel mixes with the air flowing through the secondary air passage prior to mixing with the air flowing in the primary air passage and the fuel flow from the nozzle is matched to the position of the adjustable throttle.

In the embodiment wherein the apertured block is provided at and extending downstream of the position of the fuel introduction means, the apertured block has at least one transverse bore leading from the secondary air passage to a respective one of the air passageways through the block. Each of the passageways can have a transverse bore leading from the secondary air passage. Alternatively, some of the air passageways may not be in communication with the secondary air passage and not receiving fuel-air mixture in use. Some of the air passageways may be in communication with the secondary air passage only via others of them.

The fuel introduction needle may extend into one or more of the air passageways in the apertured block.

It is envisaged that the passageway(s) having the transverse bore(s) can be configured as venturi(s) with the narrowest throat(s) being at the orifice(s) of the transverse bore.

To aid mixture of the fuel with the air in the passageways, the latter can have turbulence inducing formations downstream of the transverse bore.

To help understanding of the invention, a specific embodiment thereof will now be described by way of example and with reference to the accompanying drawing, in which:

Figure 1 is a cross-sectional side view of a fuel-air mixture apparatus of the invention;

Figure 2 is a scrap cross-sectional view on a larger scale of the needle actuator in the apparatus of Figure 1 with the needle in its closed position;

Figure 3 is a similar view of the actuator with the needle in its open position;

Figure 4 is a similar view of an alternative air passageway block;

Figure 5 is a view similar to Figure 1 of an alternative apparatus of the invention;

Figure 6 is a cross-sectional end view of the air passageway block in the apparatus of Figure 5.

The fuel-air mixture device shown in Figure 1 is a carburettor. It has an air passage member 1 defining a primary air passage 2 with an inlet 3, an adjustable throttle 4 and an outlet 5. The inlet will be connected in use to an air cleaner (not shown), the outlet will be connected to an engine manifold (not shown) and the throttle will be connected to a throttle control (also not shown). The throttle has a vane 6 carried on a shaft 7 journalled in a body 8 – into which the air passage member 1 is fitted - and having at one end a cam plate 9 against which a needle actuator 10 bears.

Referring additionally to Figures 2 & 3, the needle actuator is slidingly accommodated in a needle carrier 11 fitted into a bore 12 in the body 8 and sealed there by a pair of O-rings 13. The needle carrier is retained by a flange 14 against which a block 15 acts, the block being held in place by the throttle shaft 7. Between the O-rings 13, the needle carrier has a circumferential groove 16, which opens to the interior 17 of the needle carrier 11. A fuel supply duct 18 in the body communicates with a fuel supply line 19 and the groove 16. The interior of the needle carrier is defined by a bore 20 in which the needle actuator 10 is accommodated in a fuel tight manner, with a seal 21 in a groove at the bottom end of the actuator. A spring 22 in a lubricant chamber 23 acts beneath a flange 24 on the needle actuator and urges the latter via an end dome 25 against a rotary cam surface 26 of the cam plate 9. A needle

27 is carried axially of the needle carrier in a bore 28. The needle has a head 29 accommodated in the actuator 10. A spring 30 captivated by the dome 25 urges the needle 27 towards the primary air passage 2. A seal 31 on the needle seals it to its actuator 10. A shank 32 of the needle extends from the actuator and has at it opposite end a groove carrying an O-ring 33 and a steep taper 34, which can seat in an internal orifice 35 in the needle carrier 11, with the O-ring 33 seating just outside the orifice (see Figure 2), when the needle actuator is displaced so far by the cam as cause the head 29 and/or the seal 31 to lift from and abutment 36 in the carrier on which it normally engages, as shown in Figure 2.

In the normal operating position of the cam plate 9, as shown in Figure 3, with the needle actuator lifted by the spring 22, the needle head 29, seal 31 and abutment 36 are held together and the taper 34 is drawn clear of the orifice 35. The needle has a finely tapered needle proper 37 extending on through the orifice from the thin end of the steep taper, for varying the extent to which the orifice is open to the passage of fuel in accordance with the longitudinal position of the needle. This position is directly linked to the position of the throttle by the cam.

The needle terminates in a "pip" 38, which encourages any fuel running along its fine taper to shed as a fine droplets.

Beyond the orifice 35 of the needle carrier 11, it has an extension 39 having two external grooves 40,41, from which lead bores 42,43 to an outwardly tapering mouth 44 of the carrier. This is in register with a similarly tapering opening 45 in the air passage member 1, opening into the primary air passage 2.

A secondary air passage 46 leads from the primary air passage 2 upstream of the throttle 4. The passage 46 branches into two 47,48. The smaller 47 of these leads via a slow running, secondary air flow adjustment 49 to the upper groove 40, whose bores 42 open to the narrow end of the tapered mouth 44. The larger secondary air branch 48 intercepts the bore 49 in which the throttle shaft 7 is journalled. At the interception, the shaft has a flat 50, which aligns with the branch when the throttle is open, but closes the branch when the throttle is closed for slow running, whereby the secondary air all passes via the other branch. The larger branches opens into the

groove 41, via which its air passes on to the bores 43 and into the mouth 44 for mixing with the fuel metered by the needle.

Down-stream of the mouth 44, a block 51 is provided across the primary air passage 2. It is mounted in a ring 52 of piezoelectric material provided with an excitation circuit 53. The block has a plurality of passageways 54 through it for air flow towards the inlet manifold. These increase the turbulence in the air flow and increase the surface area on which fuel can deposit as fine droplets during the periods of stagnation corresponding to compression, ignition and exhaust for a single cylinder engine.

In operation of the carburettor, the throttle is opened. This allows the needle to move back from its position closing the orifice 34. Fuel, generally petrol, is allowed to flow at a rate appropriate to the throttle opening. It enters the mouth 44 and mixes with the secondary air flow. This air and the fuel, which represent a rich and non-homogeneous mixture, flows on to the primary air passage. Here mixture of the fuel and air reaches the desired composition. On entering the passageways 54, the homogeneity is improved by turbulence in the passageways and by the provision of a large surface area on which fuel can deposit during stagnation and be (re-)evaported during air flow. Further turbulence occurs on exit from the passageways.

Figure 4 shows an alternative construction of the block 51, in which the ring 52 is dispensed with and replaced by a series of piezoelectric tubes 55, which are all excitable. In a further, simpler alternative, the piezoelectric elements can be dispensed with as in the following embodiment.

Turning now to Figures 5 & 6, the carburettor there shown is essentially similar to that of Figures 1, 2 & 3, except that the block 151 is positioned to receive the secondary air flow directly into its passageways 154. In place of the mouth 44. the air passage member 101 has a V-slot 144 cut in it, to spread partially around the block. The block has a number of bores 160 opening from the slot 144 to convey the flow of secondary air and fuel to some of the passageways 1541. Others 1542 do not receive secondary airflow. The fuel is mixed with air flowing in these downstream of the block 151 due to turbulence in the air streams leaving the passageways.

Various variations can be envisaged. The needle may extend into one of the radial bores aligned with the needle. As shown the passageways 154 are parallel bores. At least those 1541 into which the radial bores lead may be formed with venturis at the junction with these bores to encourage the secondary air flow into them. Further downstream of the bores, the passageways may be provided with surface roughness to promote turbulent air flow and mixture of the fuel and air flowing in them.

The invention is not intended to be restricted to the details of the above described embodiment. Various alternatives have been identified in the description above just before the description of the drawing. In addition, the passageways may be provided in a variety of sizes.



FIGURE 4

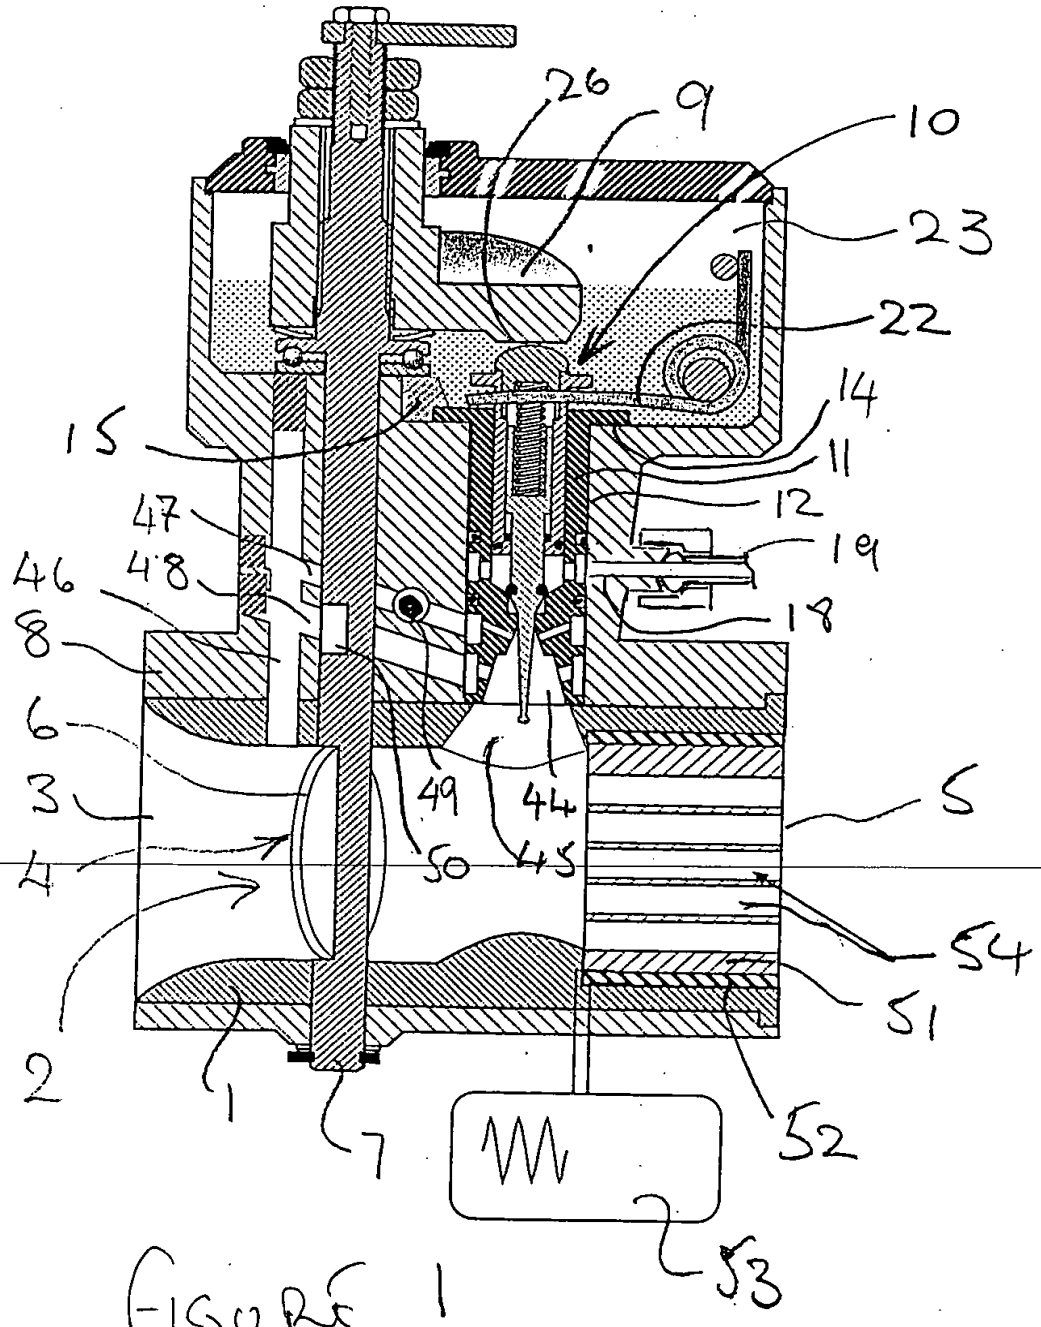

FIGURE 1

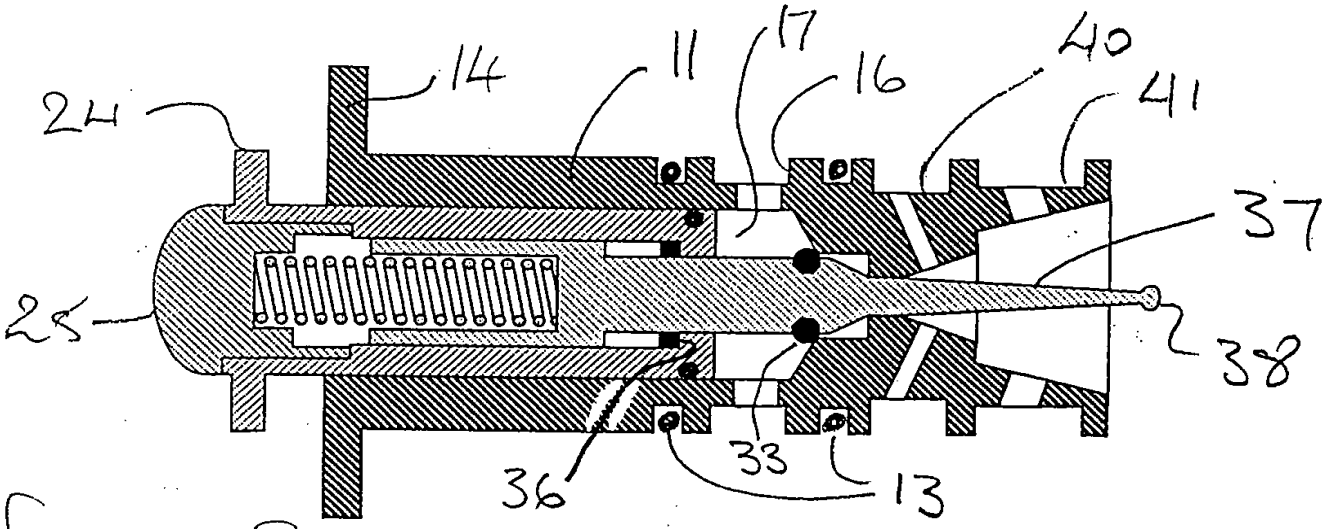

FIGURE 2

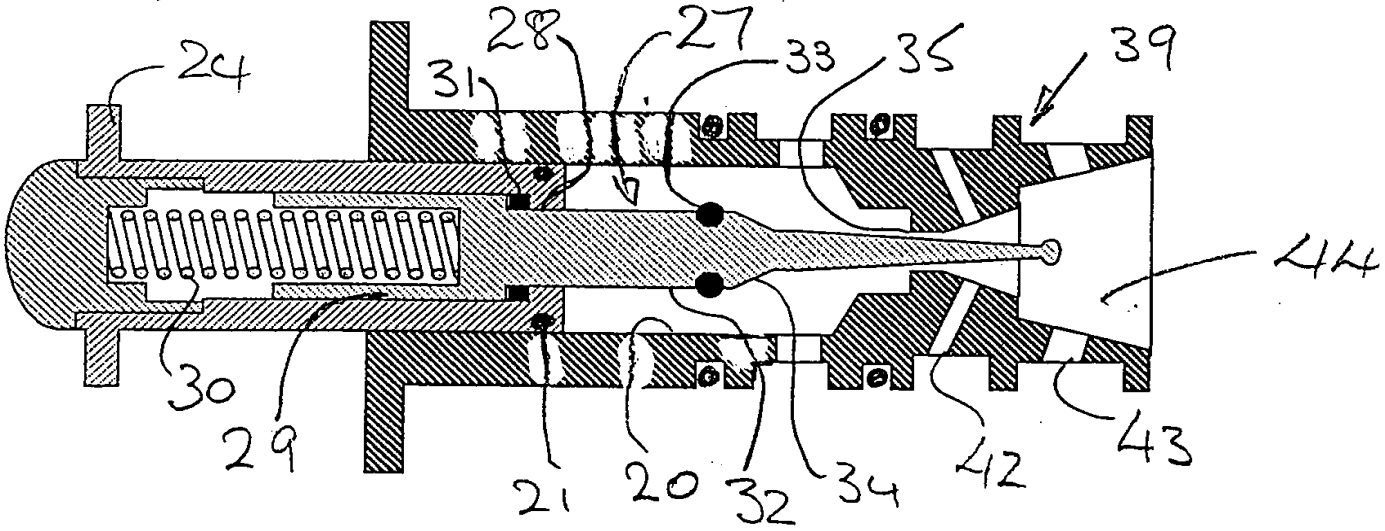

FIGURE 3

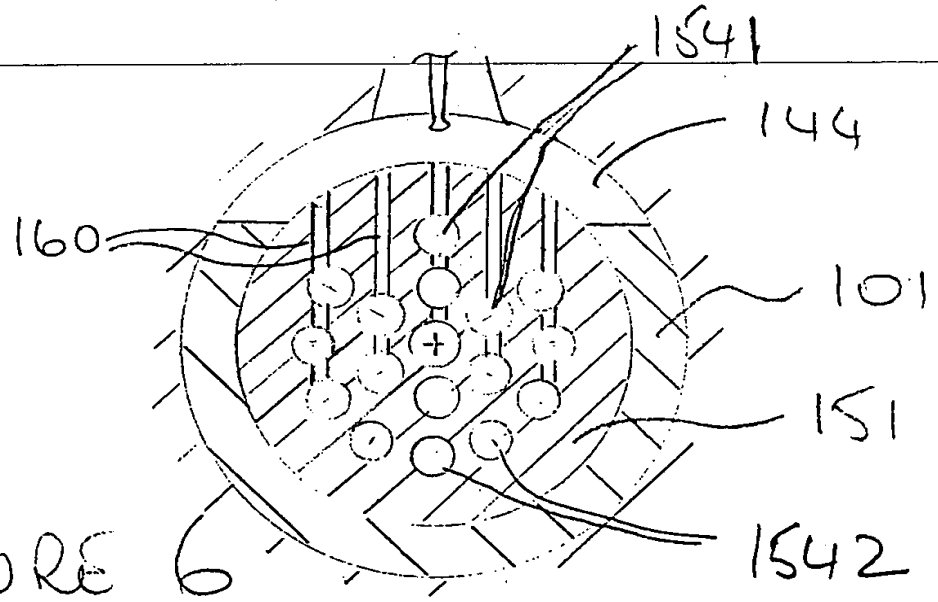

FIGURE 6

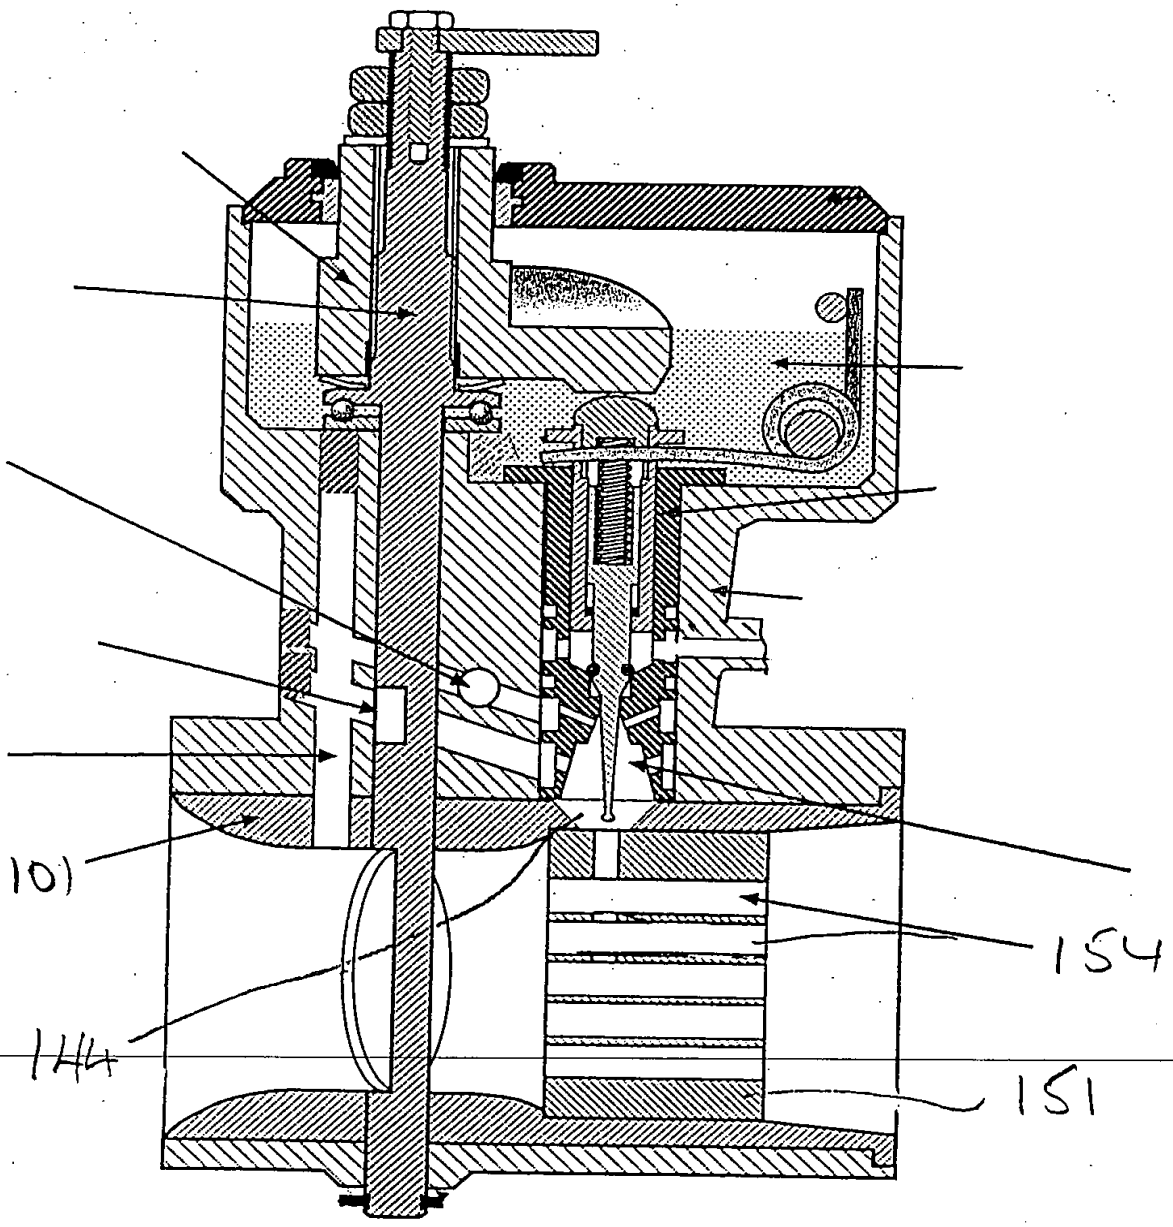

FIGURE 5